




Black Line 101

Patented electric linear conveyor with intelligent and maintenance free technology. Manufactured in high strength steel and anodized aluminum. IP62, suitable for most manufacturing industries. A decrease of feeding speed results in an increase of max distributed and attached loads. The conveyor is delivered as a complete unit including control box.

Max distributed load (in highest feeding speed)	100 kg (220 lbs)
Max attached load (in highest feeding speed)	50 kg (110 lbs)
Stroke	20 mm (0.78")
Feeding speed (mechanical adjustable)	4-8 m/min (13-26 ft/min)
Built-in warning system (motion sensor)	M12 connector
Start/Stop can be controlled from PLC	M12 connector
Motor and overload protection	built-in
Noise level	60 dB(A)
Energy consumption	0.25 kW
Electricity	110-230 VAC, 50-60 Hz
Protection class	IP62
Dimensions (LxWxH)	320x146x78 mm (12.5" x 5.4" x 2.7")
Weight	9 kg (20 lbs)

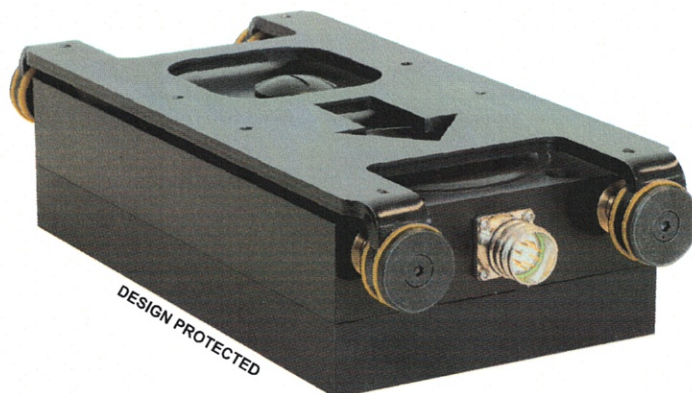

Postadress/Address:

Conveyor 22 AB
Gränsvägen 390
293 93 Olofström, Sweden

Telefon/Phone:

+46 (0)454-432 21

E-mail:

kontakt@conveyor22.se

Internet:

www.conveyor22.se

Org nr/VAT no:

556881-0393
SE556881039301